




Nu-Day Systems, LLC

ROLLER DECK

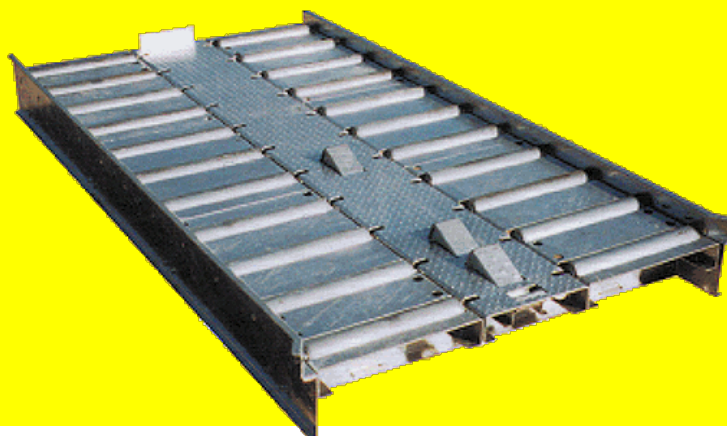

NU-DAY ROLLER DECK SPECIFICATIONS

- **CAPACITY:** Overall capacity of deck varies up to 20,000 lbs. (580 lbs. capacity per roller). 3 -1/2" x 9 gauge galvanized rollers with an 11/16" spring-loaded hex shaft.
- **ROLLER CENTERS:** Distance as required (10" standard shown).
- **STEP PLATES:** Provided between rollers. These can be smooth or checker plate finished as described below.
- **SIZE:** As needed for the desired containers.
- **CONTAINER LOCKS:** The Nu-Day Bear Claw or Grid Lock can be added as desired to hold the container during loading or unloading. For more information see the separate spec sheets for these products.
- **VARIOUS TYPE STOPS:** Optional semiautomatic spring-loaded, flip-up stops with manual release (or completely manual flip-up stops) can be added to locate various container sizes for loading, unloading, or storage.
- **SCALE DECK:** Optional load cells can be added with removable corner plates for maintenance access. Various load cells are available to weigh an array of load sizes (0-20,000+ lbs.). Also, an assortment of displays and junction boxes can be added.

Note: Nu-Day makes all varieties of decks to meet customer specifications and needs. If you require a deck that differs from our typical deck construction, please contact us. We will be happy to give you a quote for your preferred deck design, a new system, or rework of an existing system.

WARRANTY: In lieu of all other warranties, expressed or implied, Nu-Day Systems, LLC warrants its equipment under normal use and service to be free of defects in material and workmanship for one year from the time of shipment. "Normal use and service" shall not include service with corrosive or abrasive chemicals or materials, or service in conditions considered abusive by Nu-Day Systems, LLC.

